

## Setting up your product with iVMS-4500 (smartphone/tablet)

### You will need:

- If you are accessing the unit via Wi-Fi:
  - o Smartphone/tablet with Wi-Fi access
  - o Wi-Fi password
  - o Username and password of the unit (supplied by provider)
  - o Internal IP address of the unit (supplied by provider)
  
- If you are accessing the unit via SIM card:
  - o Smartphone/tablet with internet access
  - o IP address of SIM card (supplied by provider)
  - o Username and password of the unit (supplied by provider)

### Important:

- If you are setting up the unit via Wi-Fi, you will need internet access to download the iVMS-4500 software. We suggest downloading the program on your device before installation of the units.
- Make sure you have setup an account on your selected device before hand as you need to have access to the corresponding app stores.
  - o iOS – Apple account.
  - o Android – Google account.
- This document was initially setup for iOS devices but has also been tested on android.


**Contents:**

1) Installing iVMS-4500.....	3
2) Setting up your product with iVMS-4500 via SIM card.....	4
3) Setting up your product with iVMS-4500 via Wi-Fi.....	7


## 1) Installing iVMS-4500.

a) Downloading iVMS-4500 application.


- i) Open the application store on your device and search for **'iVMS-4500'**.
- ii) Click on the download button on the app shown below.

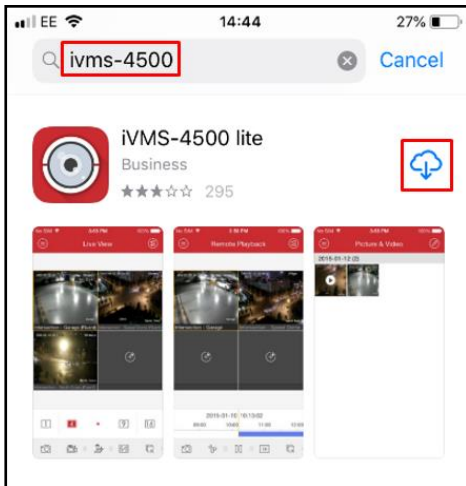

iii) Once the app has downloaded, click **'OPEN'**.

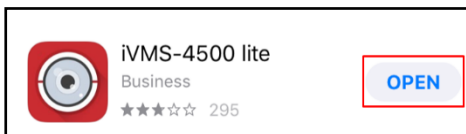


iv) Select your geographical region and click **'Enter'**.

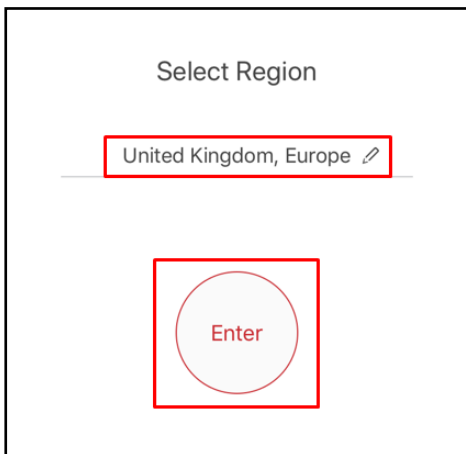


## 2) Setting up your product with iVMS-4500 via SIM card.

a) Configuring your product with iVMS-4500.


i) Select  in the top left corner and a menu will extend out.

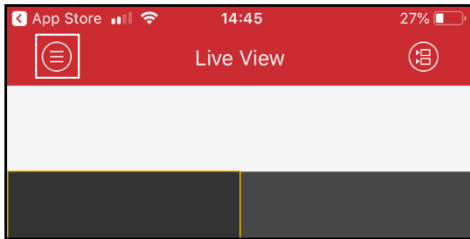


ii) Select **'Devices'**.

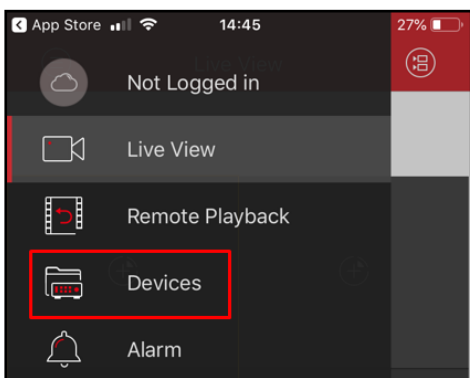

iii) Select  in the top right.

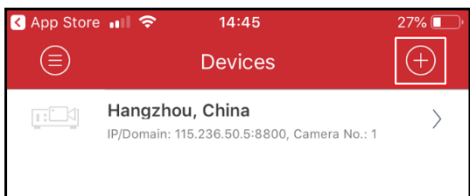

iv) Select **'Manual Adding'**.

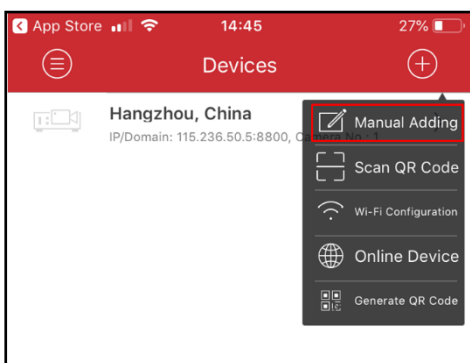


v) Type the following:




- Choose a **'Name'** for your unit.
- **'IP/Domain'** needs to be selected to add an item via IP address.
- **'Address'** will be the IP address of the SIM card inserted into the unit (if unsure ask your provider).
- **'Port'** is **'8000'** by default for all Hikvision products.
- Enter the **'User Name'** and **'Password'** you have set, or if none have been set, enter the default:

- Default **'User Name'**: *admin*
- Default **'Password'**: *Compress1766*


vi) Select  to confirm the details.

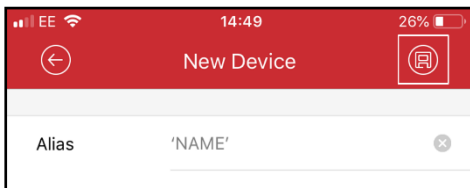

vii) Select **'Start Live View'** to view the device.

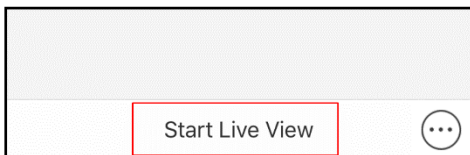


viii) The cameras should now be activated.

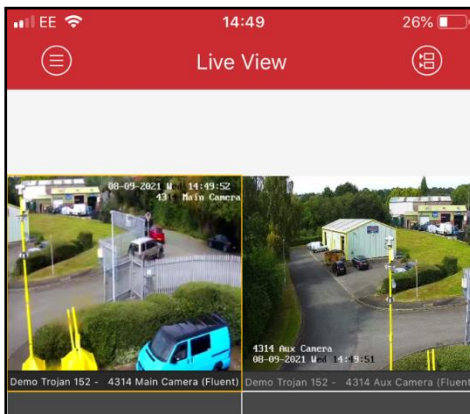


## b) Editing Device Details.

- i) If you are unable to view the device, navigate to the 'devices' menu and select the device which isn't working as intended.

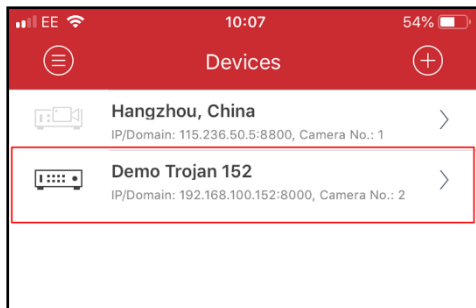


- ii) Select  in the top right to re-enter the details of the device to ensure no mistakes were made. Once complete select the **'Start Live View'**.

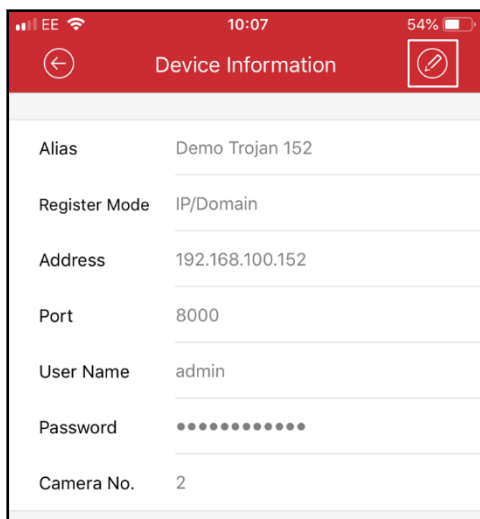


## 3) Setting up your product with iVMS-4500 via Wi-Fi.

- a) Connecting to your product from a WiFi-enabled smartphone or tablet.
  - i) From your device's WiFi settings, select the unit you wish to connect to. Enter the Wi-Fi password you have set. If a password has not been set, use the default: **'aaffbffc'**.
  - ii) Select Join.

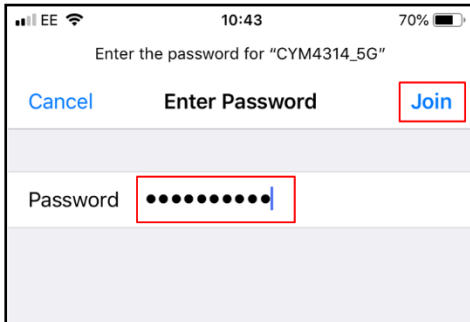


- b) Configuring your product with iVMS-4500.


- i) Select  in the top left corner and a menu will extend out.

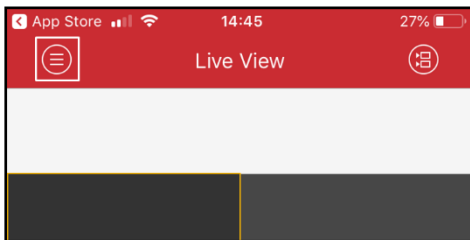


- ii) Select **'Devices'**.

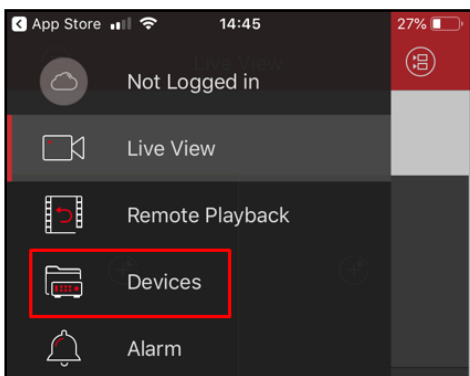


iii) Select  in the top right.

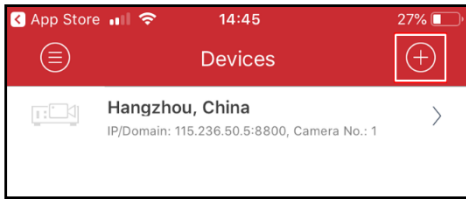

iv) Select **'Manual Adding'**.

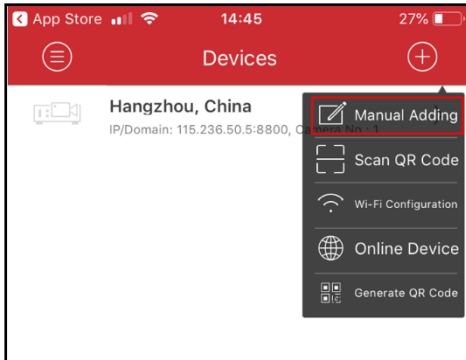


v) Type the following:

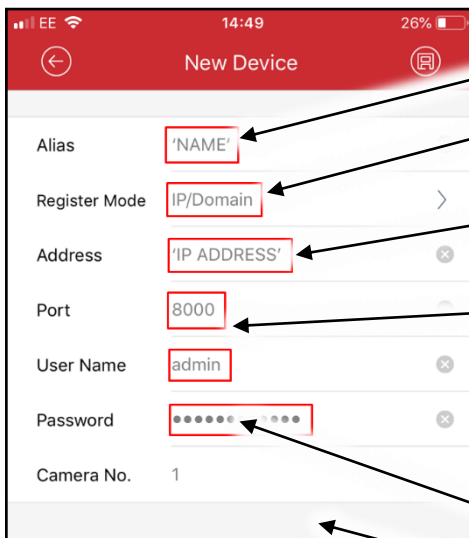


- **'Name'** is of your choosing.
- **'IP/Domain'** needs to be selected to add an item via IP address.
- **'Address'** will be the Internal IP address of the unit. Default IP: **'192.168.100.222'**.
- **'Port'** is **'8000'** by default for all Hikvision products.
- Enter the **'User Name'** and **'Password'** you have set, or if none have been set, enter the default:
  - Default **'User Name'**: *admin*
  - Default **'Password'**: *Compress1766*

vi) Select  to confirm the details.

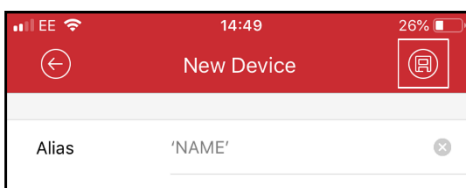



vii) Select **'Start Live View'** to view the device.

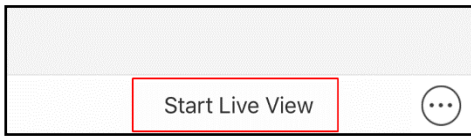


viii) The cameras should now be activated.



c) Editing Device Details.

i) If you are unable to see the units, navigate to the 'devices' menu and select the device which isn't working as intended.

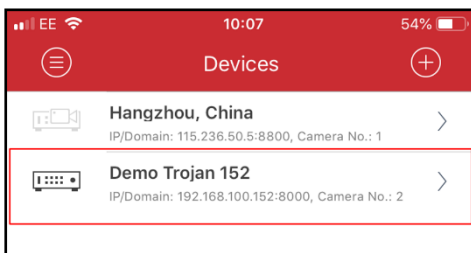

ii) Select  in the top right to re-enter the details of the device to ensure no mistakes were made. Once complete, select the **'Start Live View'**.

